

PRESENTATION SYSTEMS

EXPRES SIV



Versatile. In harmony with the product. Even under time pressure. Models are engaged to realize the customer's wishes to perfection. Down to the smallest detail. Their way of presenting a product aims to emphasize its effect. Depending on the style, they show themselves from a different side and from a different angle - a unique balance between individuality and adaptation. As for us, it's not a question of one or the other. But rather: How can both be combined in our presentation systems to provide you with an individual product presentation and, at the same time, a system that can be used anywhere and at any time? Here are a few expressive answers.

INTRO



STYLISH



CONTENT

Mobile booths	6
OCTAwall 40 toolless	6
OCTAwall 40 classic	8
OCTAlumina toolless	14
OCTAlumina	16
 Counter	 18
OCTAcounter unlit	18
OCTAlumina illuminated counter	20
 Presentation stands	 22
Literature rack	22
 Panel and fabric dimensions	 24



Planning exhibition
booths like a pro
www.octasketch.net

OCTAWALL 40 TOOLLESS – BASIC MODULES

Elegant aluminium surface | plug-in connection included | portable | easy to assemble and disassemble | individually adaptable | modular design


TOOLLESS FRAME 800 × 2000 MM



W 401M.90

Aluminium | 1 × frame of W 906, for double-sided fabric, with plugable connection, incl. 2 × rotatable foot plates M 1956 and 1 × bracing, incl. 1 × shoulder bag W 494, 4 × corner connector W 916M, 2 × connector OL 240M, 3 × mounting-set M 1496, Drillings for cable management available on request

7.59 kg | W 800 × H 2000 × D 40 mm




TOOLLESS FRAME 950 × 2480 MM



W 402M.90

Aluminium | 1 × frame of W 906, for double-sided fabric, with plugable connection, incl. 2 × rotatable foot plates M 1956 and 1 × bracing, incl. 1 × shoulder bag W 494, 4 × corner connector W 916M, 2 × connector OL 240M, 3 × mounting-set M 1496, Drillings for cable management available on request

8.93 kg | W 950 × H 2480 × D 40 mm



Custom size:
W 403M

MOBILE BOOTHS

OCTAwall 40 toolless


TOOLLESS FRAME 950 × 2480 MM



W 412M.90

Aluminium | 1 × frame of W 906, for double-sided fabric/panel, with pluggable connection, incl. 2 × adjustable foot C 440/F and 1 × bracing, incl. 1 × shoulder bag W 494, 4 × corner connector W 916M, 2 × connector OL 240M, 3 × mounting-set M 1496, optional with hook tape W 840, Drillings for cable management available on request

8.11 kg | W 950 × H 2480 × D 40 mm




Custom size:
W 413M

TOOLLESS DOOR UNIVERSAL, DIVIDED IN THE MIDDLE



W 425M.01

Aluminium | 1 × door element of M 1305/W 906, for double-sided fabric/panel, with plug-in connection (middle), for DIN left and DIN right, incl. door leaf frame, door upright frame and door roof frame, with hook tape W 840, without dead lock cylinder W 514, optional: transport bag W 425, outer frame dimension: 855 × 2021 mm (door leaf frame), 870 × 450 mm (door frame top)
20.50 kg | W 950 × H 2500 × D 40 mm



Matching
window element:
W 414

OCTAWALL 40 TOOLLESS – ACCESSORIES

	S 381M UPRIGHT WITH END CAP for corner, with silicone edge and foot		W 466 REINFORCING PLATE for max load 5 kg
	M 951 SCREWDRIVER hex-star T30		W 996 CABLE PROTECTION plastic, opening 51.7 × 16.7 mm
	M 1498 LED SPOT 12 W / 230 V		W 472 BEAM magnet fixing beam, 870 × 125 mm
	D 931 CEILING ELEMENT aluminium, 950 × 2480 mm		W 474 MAGNET for beam W 472
	W 514 DEAD LOCK CYLINDER steel, incl. 3 keys		W 478 LITERATURE RACK for beam W 472 incl. 2 × magnet W 474
	W 916M KNUCKLE for pluggable connections		W 476 SHELF for beam W 472 incl. 2 × magnet W 474
	M 1496 FIXING SET for connection of frame element		W 464 MONITOR MOUNT for mounting of monitors to long holes
	OL 240M STRAIGHT CONNECTOR for pluggable connections		W 494 SHOULDER BAG textile black, with hook-and-loop tape

OCTAWALL 40 CLASSIC – BASIC MODULES

Elegant aluminium surface | portable | easy to assemble and disassemble | individually adaptable | modular design



MOBILE BOOTHS


OCTAwall 40 classic

FRAME ELEMENT FOR FABRIC + PANEL



Aluminium | 1 x frame of W 906 for double sided fabric/ panel, for mounting on frame or extrusion, incl. 2 x C 440/F adjustable foot and 3 x mounting-set M 1477, incl. hook tape W 840, with W 916 internal corner connector (no mitre needed), with drillings for M 1951 and M 1953

Drillings for cable management possible on request, fabric dimension = outer frame dimension



Alternative design with miter cut available

W 440/E.01
STRAIGHT, 990 x 2480 MM

Frame size:
W 990 x H 2480 x D 40 mm
3 x mounting set M 1477
7.85 kg

W 442/E.01
STRAIGHT, 950 x 2480 MM

Frame size:
W 950 x H 2480 x D 40 mm
6 x mounting set M 1477, for installation between 2 uprights
7.76 kg

W 447/E.01
STRAIGHT, 495 x 2480 MM

Frame size:
W 495 x H 2480 x D 40 mm
3 x mounting set M 1477
6.82 kg

W 449/E.01
STRAIGHT, 455 x 2480 MM

Frame size:
W 455 x H 2480 x D 40 mm
6 x mounting set M 1477, for installation between 2 uprights
6.73 kg

W 444/E.01
STRAIGHT, CUSTOM SIZE

Custom size:
Dimensions, design and accessories must be specified

W 441/E.01
CURVED, 495 x 2480 MM

Frame size:
W 495 x H 2480 mm
3 x mounting set M 1477
7.74 kg

W 443/E.01
CURVED, CUSTOM SIZE

Curved, custom size:
Radius, dimensions, design and accessories must be specified



May not be possible with W 916 depending on radius

FRAME ELEMENT


DIVIDABLE, 950 × 2480 MM



W 932

Aluminium | 1 × frame of M 1307 for double sided fabric, dividable in the centre, incl. 2 × C 440/F adjustable foot and 4 × mounting-set M 1477, with 4 × corner connector Z 990, with drillings for M 1951 and M 1953, drillings for cable management possible on request

8.08 kg | W 950 × H 2480 × D 40 mm



DOOR ELEMENT


UNIVERSAL, 950 × 2500 MM



W 575.01

Aluminium/Steel | 1 × door element made of W 906, for fabric/panel on both sides, DIN left/right, inward/outward opening, incl. doorleafframe, dooruprightframe, threshold plate and door frame (top), hook tape W 840, extrusion connector E 438, without dead lock cylinder W 514, outer frame dimensions: door leaf frame: 855 × 2021 mm, door frame (top): 870 × 450 mm. Only use silicone edge 12 × 3 mm for doorleafframe

18 kg | W 950 × H 2500 × D 40 mm



WINDOW ELEMENT

FOR DOOR ELEMENT W 575



W 414.01


Aluminium | 1 × window element made of W 906 for double sided fabric/panel, in addition to door element W 425, width of horizontal beams matches the width of the door element, Window size: W 200 × H 800 mm

4.96 kg | W 775 × H 1941 × D 40 mm



FRAME ELEMENT


ABOVE DOOR, 950 MM



W 945/S.01

Aluminium | 1 × frame, of M 1307 for double-sided fabric, for mounting above door W 971 / W 973, incl. 2 × M 1477 mounting sets, drillings for cable management available on request. To be used as inner frame in connection with frame W 938

5.55 kg | W 950 × H 450 × D 40 mm



CORNER UPRIGHT


DIVIDABLE, 2500 MM



W 992.01

Aluminium | 1 × corner extrusion 90° of M 1000, divided, for corner connection of frames W 930 and W 932, 2 × extrusion M 1000, 1 × internal connector straight Z 978, 1 × adjustable foot C 430

3.30 kg | L 40 × W 40 × H 2500 mm



MOBILE BOOTHS

OCTAwall 40 classic


CORNER CONNECTOR FOR FRAME ELEMENT



Z 990.00

Zinc die cast | 90°, for extrusions with 21 × 12 mm lock chamber, incl. 2 × M10 threads for adjustable foot C 440/F, incl. 2 × hex-star screw E 111 and E 111/20

0.14 kg | L 96 × W 96 × H 12 mm



TRIANGULAR EXTRUSION




M 1072.01


Aluminium

for corners, for connection on 2 sides, can also be mounted horizontally for wall bracing

4.85 kg | L 6000 × W 40 × H 56 mm



COVER EXTRUSION FOR FRAME 40 MM




W 910.01

Aluminium | to clad the system groove, for frame elements with 40 mm, incl. 10 × plastic clip E 470/C, Recommendation: 2 × E 470/C per meter

1.34 kg | L 5000 × W 40 × H 5 mm




MAGNET FIXING BEAM FOR W 478 / W 476



W 472.37

Steel | for toolless installation of literature rack W 478 and shelf W 476 to frames, 1 × steel sheet with 4 × hammerhead screw (M 1348/HA) and 4 × knurled nut (E 735/1), for frame width 950 mm

1.46 kg | L 870 × W 19 × H 125 mm




MAGNET FOR MAGNET FIXING BEAM



W 474.37

Neodym / Steel | for mounting of literature rack W 478 and shelf W 476 to beam W 472, incl. 1 × hammerhead screw M 474-HA (M8) and 1 × washer M 1435-40 (M8)

0.06 kg | 36 mm dia.




SHELF FOR MAGNET FIXING BEAM

W 476.20

Steel I for fast mounting to beam W 472, incl. 2 × magnet W 474, mounted behind fabric

1.58 kg | L 310 × W 220 × H 90 mm




Attention: max load capacity 2 kg!

LITERATURE RACK FOR MAGNET FIXING BEAM

W 478.20

Steel I for fast mounting to beam W 472, incl. 2 × magnet W 474, mounted behind fabric

1.66 kg | W 220 × H 304 mm



Attention: max load capacity 2 kg!

OCTAWALL 40 CLASSIC – ACCESSORIES

	M 951	SCREWDRIVER Hex-star T30		MF 15	MAGNETIC WALL RETAINER for max load 5 kg
	M 1498	LED SPOT 12 W / 230 V		MF 80	STEEL PLATE steel, 2 mm, 300 × 200 mm
	M 1951	BASE PLATE steel, side, 600 × 250 mm		MF 82	STEEL PLATE steel, 2 mm, 719 × 200 mm
	M 1953	BASE PLATE steel, middle, 600 × 250 mm		MF 150 P	WOOD SHELF white, 8 mm, 300 × 150 mm
	M 1961	HALF BASE PLATE steel, side, 320 × 250 mm		MF 306 S	BRACKET steel, straight, chrome plated, for 8 mm
	M 1963	HALF BASE PLATE steel, middle, 320 × 250 mm		W 927	TRANSPORT BAG for 2 base plates
	MF 1	ASSEMBLY HANDLE for easier assembly of wall retainer		W 1000	DISTANCE PIECE to fix frames during transport

MOBILE BOOTHS

OCTAwall 40 classic





OCTALUMINA TOOLLESS – BASIC MODULES

Elegant aluminium surface | with or without system groove | flat welt technology | single or double-sided fabric mounting

LIGHT FRAME 120 MM DOUBLE SIDED, 800 × 1800 MM




incl. transport
bag

OL 1202

Aluminium | 1 × free standing frame with bracing, LED modules single-sided and LED power supply unit mounted, incl. 2 m cable with plug and 2 × rotatable base plate, for single or double sided back-lit graphics, for toolless assembly, incl. transport bag OL 901
without fabric/graphics

16.19 kg | W 800 × H 1800 × D 120 mm



MOBILE BOOTHS

OCTAlumina toolless


LIGHT FRAME 120 MM DOUBLE SIDED, 1000 × 2480 MM



OL 1210T

Aluminium | 1 × free standing frame divided laterally in the middle, for double-sided back-lit graphics, toolless, LED modules and LED power supply unit mounted, incl. 1 × cable 2 m with plug and 2 × base plate, pack size: 1200 × 250 × 200 mm (9,5 kg), 1420 × 250 × 200 mm (10,5 kg) **without fabric/graphics**

18.50 kg | W 1000 × H 2480 × D 120 mm




LIGHT FRAME 120 MM DOUBLE SIDED, 2000 × 2480 MM



OL 1220T

Aluminium | 1 × free standing frame divided laterally in the middle, for double-sided back-lit graphics, toolless, LED modules and LED power supply unit mounted, incl. 1 × cable 2 m with plug and 2 × base plate, pack size: 1280 × 260 × 200 mm (14 kg), 1420 × 260 × 200 mm (12 kg) **without fabric/graphics**

24.70 kg | W 2000 × H 2480 × D 120 mm




LIGHT FRAME 120 MM DOUBLE SIDED, 3000 × 2480 MM




OL 1230T

Aluminium | 1 × free standing frame divided laterally in the middle, for double-sided back-lit graphics, toolless, LED modules and LED power supply unit mounted, incl. 1 × cable 2 m with plug and 2 × base plate, pack size: 1790 × 260 × 200 mm (21.5 kg), 1420 × 260 × 200 mm (12 kg) **without fabric/graphics**

33.50 kg | W 3000 × H 2480 × D 120 mm



LIGHT FRAME 120 MM DOUBLE SIDED, CUSTOM SIZE




OL 1290T

Aluminium | 1 × free standing frame, for double-sided back-lit graphics, toolless, LED modules and LED power supply unit mounted, incl. 1 × cable 2 m with plug and base plates

custom size: please advise dimensions

without fabric/graphics



i X = max. 3000 mm
Y = max. 2480 mm

LIGHT FRAME 120 MM DOUBLE SIDED, CUSTOM SIZE




OL 1291T

Aluminium | 1 × frame for double-sided back-lit graphics, toolless, LED modules and LED power supply unit mounted, incl. 1 × cable 2 m with plug and adjustable feet

custom size: please advise dimensions

without fabric/graphics



i X = max. 3000 mm
Y = max. 2480 mm

i incl. adjustable feet

OCTALUMINA – BASIC MODULES

Elegant aluminium surface | with or without system groove | flat welt technology | single or double-sided fabric mounting


LIGHT FRAME 40 MM SINGLE SIDED, 950 × 2480 MM



OL 415

Aluminium | 1 × frame element single-sided illuminated of M 1970, with system groove, aluminium composite panel with LED modules mounted, incl. 2 m cable with plug, with 2 × adjustable foot
without fabric/graphics

62.00 kg | W 950 × H 2480 × D 40 mm




LIGHT FRAME 120 MM DOUBLE SIDED, 1000 × 2480 MM



OL 1210

Aluminium | 1 × free standing frame with bracing, for double-sided back-lit graphics, LED modules and LED power supply unit mounted, 6160 lumen, 60 watt, incl. 1 × cable 2 m with plug and 2 × base plate
without fabric/graphics

20.03 kg | W 1000 × H 2480 × D 120 mm




LIGHT FRAME 120 MM DOUBLE SIDED, 2000 × 2480 MM



OL 1220

Aluminium | 1 × free standing frame with bracing, for double-sided back-lit graphics, LED modules and LED power supply unit mounted, 12320 lumen, 120 watt, incl. 1 × cable 2 m with plug and 2 × base plate
without fabric/graphics

24.93 kg | W 2000 × H 2480 × D 120 mm




LIGHT FRAME 120 MM DOUBLE SIDED, 3000 × 2480 MM



OL 1230

Aluminium | 1 × free standing frame with bracing, for double-sided back-lit graphics, LED modules and LED power supply unit mounted, 14960 lumen, 144 watt, incl. 1 × cable 2 m with plug and 2 × base plate
without fabric/graphics


37.80 kg | W 3000 × H 2480 × D 120 mm



MOBILE BOOTHS

OCTAlumina


LIGHT FRAME 120 MM DOUBLE SIDED, 4000 × 2480 MM




OL 1240

Aluminium | 1 × free standing frame with bracing, for double-sided back-lit graphics, LED modules and LED power supply unit mounted, 19800 lumen, 195 watt, incl. 1 × cable 2 m with plug and 3 × base plate
without fabric/graphics

39.81 kg | W 4000 × H 2480 × D 120 mm




LIGHT FRAME 40 MM A0, 1189 × 841 MM



OL 400

Aluminium | 1 × frame element single-sided illuminated of M 1930, without system groove, lighting method: back-lit 8750 lumen, 112 W, 24 V, incl. 1 × power supply unit (external), light color: 6000 Kelvin (daylight white), dimmer also available, back: aluminium sandwich panel 3 mm
without fabric/graphics

11.73 kg | W 1184 × H 841 × D 40 mm



i Custom size:
OL 490


LIGHT FRAME 40 MM A1, 841 × 594 MM



OL 401

Aluminium | 1 × frame element single-sided illuminated of M 1930, without system groove, lighting method: back-lit, 4375 lumen, 56 W, 24 V, incl. 1 × power supply unit (external), light color: 6000 Kelvin (daylight white), dimmer also available, back: aluminium sandwich panel, 3 mm
without fabric/graphics

6.39 kg | W 841 × H 594 × D 40 mm




BAR TABLE 500 × 1031 MM



OL T50

Bar table with 4 illuminated sides, corners with no visible edges, with tabletop, Power: 19W, Power adapter: OL 191, Light color: 5600K, table plate: 570 × 570 mm, outer frame dimension: W 498 × H 998 mm
without fabric/graphics

14.14 kg | L 570 × W 570 × H 1031 mm





OCTACOUNTER – BASIC MODULES

Elegant aluminum surface | portable | easy to assemble and disassemble | individually adaptable | space-saving


OCTACOUNTER 902 × 965 × 379 MM



Q 400.31

Aluminium/Wood |
base set, silver grey RAL 9006

25.78 kg | L 902 x W 379 x H 965 mm




OCTACOUNTER FABRIC 910 × 912 × 446 MM



Q 800.31

Aluminium/Wood | base-set, silvergrey RAL 9006,
isplacement (45°) of the groove for flat welt, measurements
for prints: front: W 905 × H 905 mm,
side: W 445 × H 905 mm

17.50 kg | L 910 × W 446 × H 912 mm



Attention:
without doors!

OCTACOUNTER Q 400 – ACCESSORIES

	Q 420.31 TCOUNTER TOP EXTENSION wood / perforated aluminium panel, height 273 mm
	Q 411.31 DOOR SET silver grey RAL 9006
	Q 411.30 DOOR SET white
	Q 510 TRANSPORT BOX for 1 × Q 400
	Q 511/N TRANSPORT BAG with castors, for 1 × Q 400 and 1 × Q 411



OCTALUMINA COUNTER UNLIT – BASIC MODULES

Elegant aluminum surface | portable | easy to assemble and disassemble | individually adaptable | incl. lighting | space-saving


OCTALUMINA COUNTER 1000 × 1200 × 449 MM



OL C500

Aluminium | with lockable wing doors, incl. 1 × shelf, OCTAlumina 80 (single-sided) front frame, pre-assembled LED modules and PSU, space-saving foldable side panels, easy assembly, with fabric, Fire rating B1, outer frame dimensions: W 1000 × H 1129 mm **without graphics**

42.50 kg | W 1000 × H 1200 mm × D 448 mm



COUNTER ILLUMINATED

OCTAlumina counter illuminated | Basic modules



OCTALUMINA FABRIC COUNTER


910 × 912 × 446 mm



OL C800

Aluminium/Wood | incl. 2 × shelves, OCTAlumina front frame, fabric wing doors without illumination, pre-assembled LEDs and PSU, cable length 2 m, space-saving, foldable, easy assembly, outer frame dimensions front: W 900 × H 900 mm, outer frame dimensions side: W 440 × H 900 mm **without graphics**

24.00 kg | W 900 × H 912 × D 440 mm



LITERATURE RACK – BASIC MODULES

Elegant aluminum surface | mobile or wall-mounted | easy to assemble and disassemble


LITERATURE RACK 3 × DIN A4, 265 × 1200 MM



P-3

Aluminium | with 3 x DIN A4 compartment, literature shelves made of transparent acrylic glass

4.88 kg | L 265 x W 280 x H 1200 mm



PRESENTATION STANDS


Literature rack

PART NUMBER	DESCRIPTION	DIMENSION (W×H)
OL 400	OCTAlumina, frame element 1189 × 841 mm	fabric: 1189 × 841 mm
OL 401	OCTAlumina, frame element 841 × 594 mm	fabric: 841 × 594 mm
OL 415	OCTAlumina, frame element 950 × 2480 mm	fabric: 950 × 2480 mm
OL 1202	OCTAlumina toolless, frame element 800 × 1800 mm	fabric: 800 × 1800 mm
OL 1210	OCTAlumina, frame element 950 × 2480 mm	fabric: 950 × 2480 mm
OL 1220	OCTAlumina, frame element 2000 × 2480 mm	fabric: 2000 × 2480 mm
OL 1230	OCTAlumina, frame element 3000 × 2480 mm	fabric: 3000 × 2480 mm
OL 1240	OCTAlumina, frame element 4000 × 2480 mm	fabric: 4000 × 2480 mm
OL C500	OCTAlumina counter, 1000 × 1200 × 449 mm	fabric: 1000 × 1129 mm
OL C800	OCTAlumina fabric counter, 910 × 912 × 446 mm	fabric: front: 905 × 905 mm side: 445 × 905 mm
OL T50	OCTAlumina, bar table 570 × 1031 × 570 mm	fabric: 498 × 998 mm
Q 400	OCTAcounter, 902 × 965 × 379 mm	panel: 800 × 875 mm
Q 800	OCTAcounter fabric, 910 × 912 × 446 mm	fabric: front: 905 × 905 mm side: 445 × 905 mm
W 440/E	OCTAwall 40 classic, frame element 950 × 2480 mm	fabric: 990 × 2480 mm
W 442/E	OCTAwall 40 classic, frame element 950 × 2480 mm	fabric: 950 × 2480 mm
W 447/E	OCTAwall 40 classic, frame element 950 × 2480 mm	fabric: 495 × 2480 mm
W 449/E	OCTAwall 40 classic, frame element 950 × 2480 mm	fabric: 455 × 2480 mm

PANEL AND FABRIC DIMENSIONS

Presentation systems

PART NUMBER	DESCRIPTION	DIMENSION (W×H)
W 441/E	OCTAwall 40 classic, frame element 950 × 2480 mm	fabric: outside: 858 × 2480 mm panel: inside: 794 × 2475 mm
W 401M	OCTAwall 40 toolless, frame element 800 × 2000 mm	fabric: 800 × 2000 mm
W 402M	OCTAwall 40 toolless, frame element 950 × 2480 mm	fabric: 950 × 2480 mm
W 425M	OCTAwall 40 toolless, door element 950 × 2480 mm	fabric: roof light: 870 × 450 mm door: 855 × 2021 mm
W 575	OCTAwall 40, door element 950 × 2500 mm	fabric: roof light: 870 × 450 mm door: 855 × 2021 mm
W 932	OCTAwall 40 classic, frame element 950 × 2480 mm	fabric: 950 × 2480 mm
W 945/S	OCTAwall 40 classic, frame element 950 × 450 mm	fabric: 950 × 450 mm

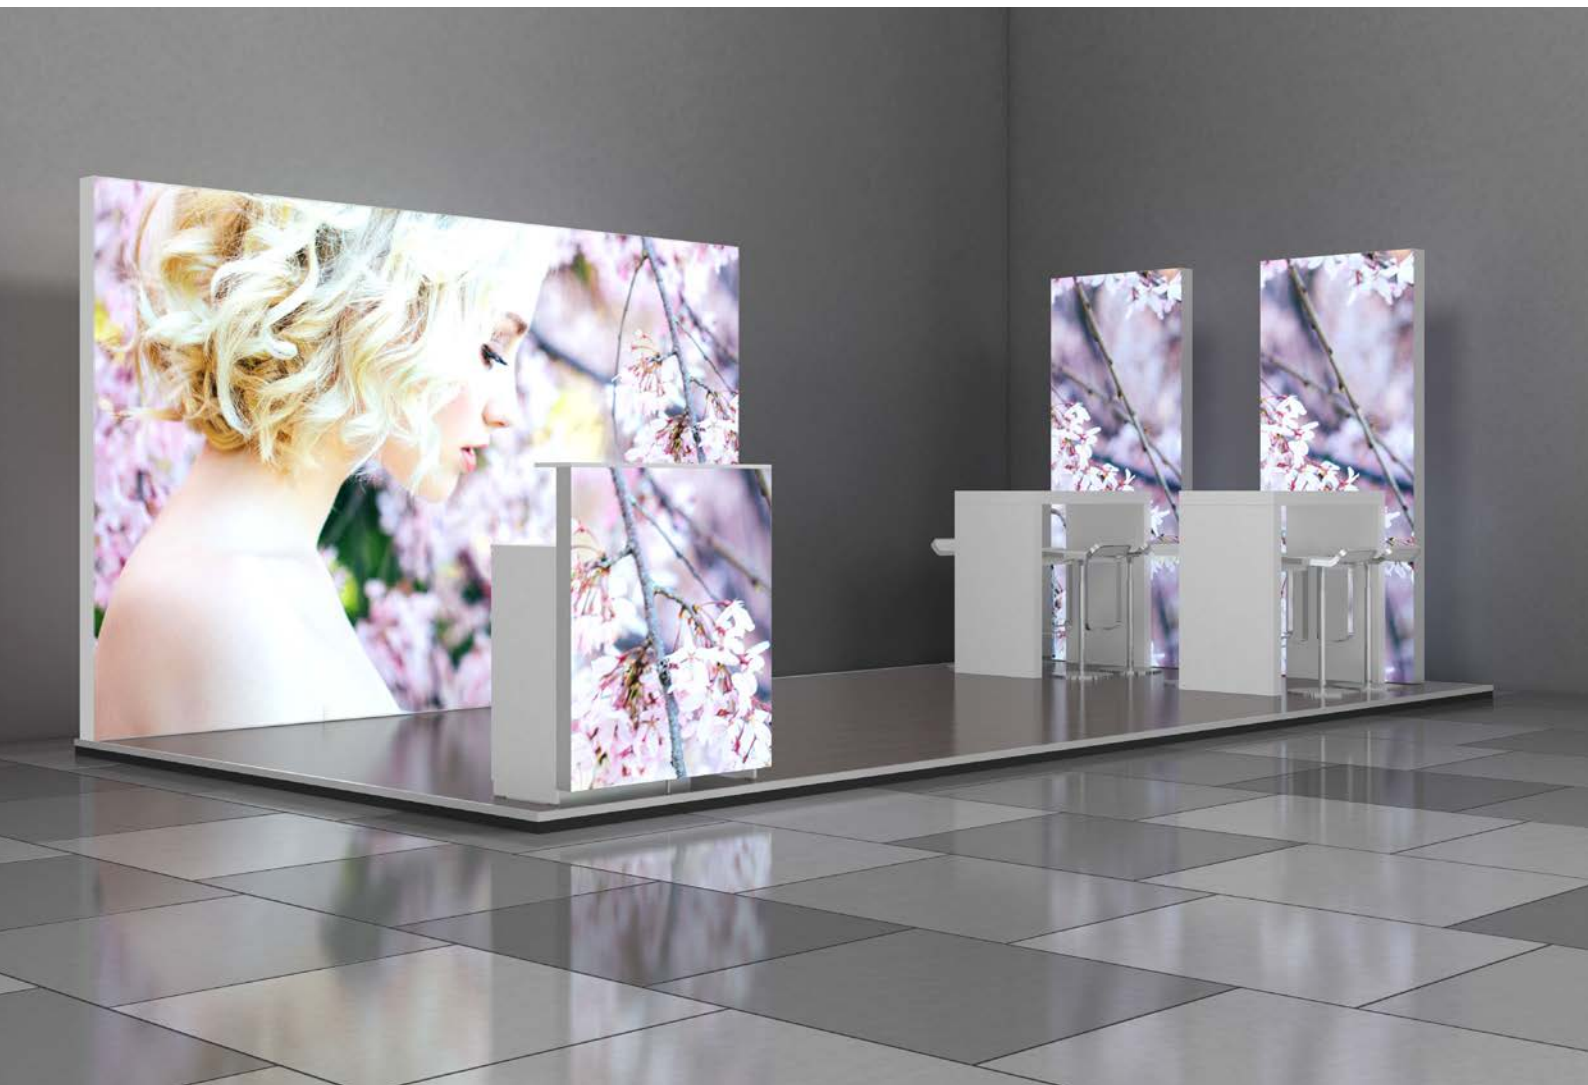



EXHIBITION SYSTEMS
PROJECT SOLUTIONS
PRESENTATION
INTERIOR DESIGN
CLEAN ROOM SYSTEMS

OCTANORM® Germany**Head Office**

Raiffeisenstraße 39
70794 Filderstadt
T. +49 711 77003-0
F. +49 711 77003-53
info@octanorm.de
www.octanorm.com

EUROPE**OCTANORM® Nordic**

T. +46 8 621 6500
www.octanorm.se

OCTANORM® Polska

T. +48 22 773 0350
www.octanorm.pl

OCTANORM® Belgium

T. +32 475 35 60 76
www.octanorm.be

OCTANORM® France

T. +33 6 79 11 32 05
www.octanorm.fr

OCTANORM® UK

T. +44 20 85 45 2945
www.octanorm.co.uk

OCTANORM® Espana

T. +34 930 019 424
www.octanorm.es

OCTANORM® Hellas

T. +30 2310 79 6521
www.octanorm.gr

OCTANORM® Italia

T. +39 031 2269715
www.octsystem.it

OCTANORM® Adria

T. +386 590 56301
www.octanormadria.com

AFRICA**OCTANORM® Nigeria**

T. +234 8030 8211 91
www.it-al.design

OCTANORM® South Africa

T. +27 11 433 2010
www.octanorm.co.za

AMERICA**OCTANORM® North America**

T. +1 770 7 32 1520
www.octanormna.com

OCTANORM® México

T. +52 55 5804 6325
www.octanorm.com.mx

AUSTRALIA**OCTANORM® Australia**

T. +61 3 7017 2753
www.octanorm.com.au

ASIA**OCTANORM® China**

T. +86 512 6283 3336
www.octanorm.cn

OCTANORM® Japan

T. +81 45 511 8144
www.octanorm.co.jp

MIDDLE EAST**OCTANORM® Emirates**

T. +971 4 340 6888
www.octanormemirates.net